



Push - Series 200 hinges - For thicker doors - 155° opening

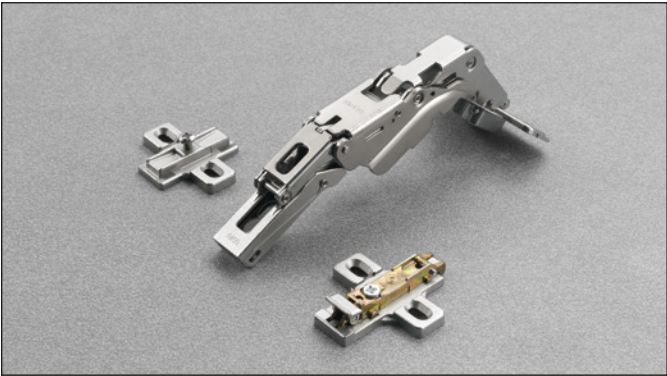

Technical information

Push hinges are reverse-sprung so that the door self-opens when the release device is activated.

For thicker doors max. 28 mm.
Hinge with greater opening angle and reduced operating profile.
8.5 mm deep die-cast cup.
155° opening.
Possible drilling distance on the door (K): from 3 to 9 mm.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates



	T=	16	18	20	22	24	25	26	27	28
K=3	A=	0.0	0.0	0.0	0.0	0.0	0.10	0.40	0.75	1.20
K=4	A=	0.0	0.0	0.0	0.0	0.0	0.15	0.45	0.85	1.35
K=5	A=	0.0	0.0	0.0	0.0	0.0	0.20	0.50	0.95	120° 1.70
K=6	A=	0.0	0.0	0.0	0.0	0.0	0.25	0.60	1.10	120° 1.95
K=7	A=	0.0	0.0	0.0	0.0	0.0	0.30	0.70	1.30	100° 2.30
K=8	A=	0.0	0.0	0.0	0.0	0.0	0.35	0.85	120° 1.70	100° 2.80
K=9	A=	0.0	0.0	0.0	0.0	0.15	0.55	1.20	100° 2.15	

With stop device at 100° part. no. S2BM37XG

With stop device at 120° part. no. S2AM37XG

The above values are calculated on the assumption that the doors have square edges. They are reduced if the doors have radiussed edges.

For spaces with removable components

“C” value

The door opens at 90° with lateral door protrusion of 6 mm.
The figures are based on a straight arm hinge and H=0 thickness of mounting plate.

