




Fixing part-extension runner on cabinet side.

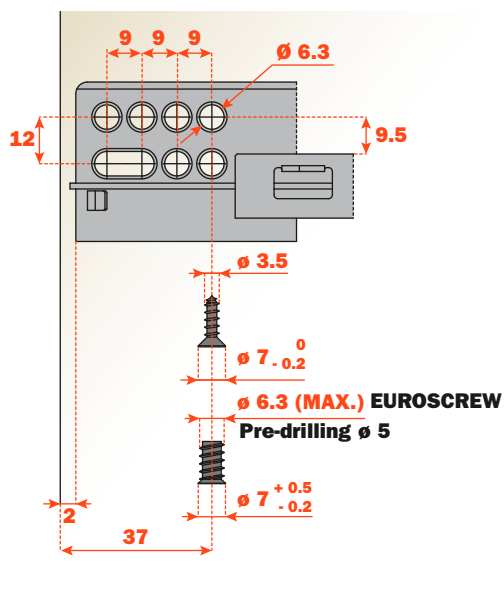


Fixing full-extension runner on cabinet side.

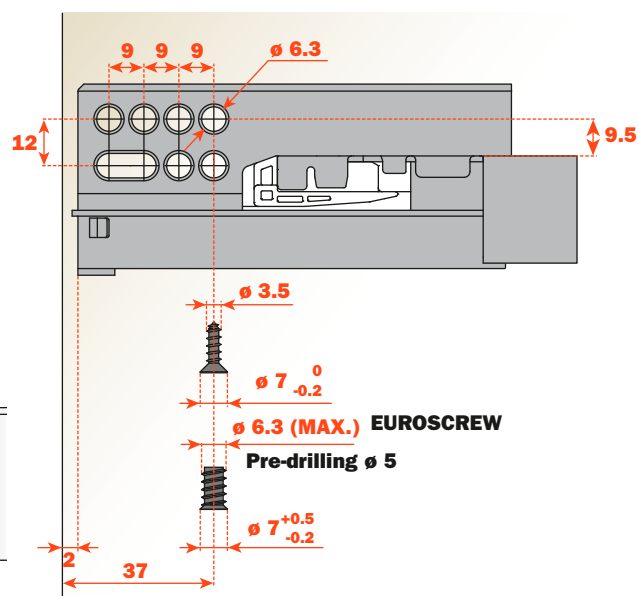


The oval slot allows the easy alignment of drawer frontals particularly in multi drawer and Push applications.

Drilling positions for runner on cabinet side. Part-extension

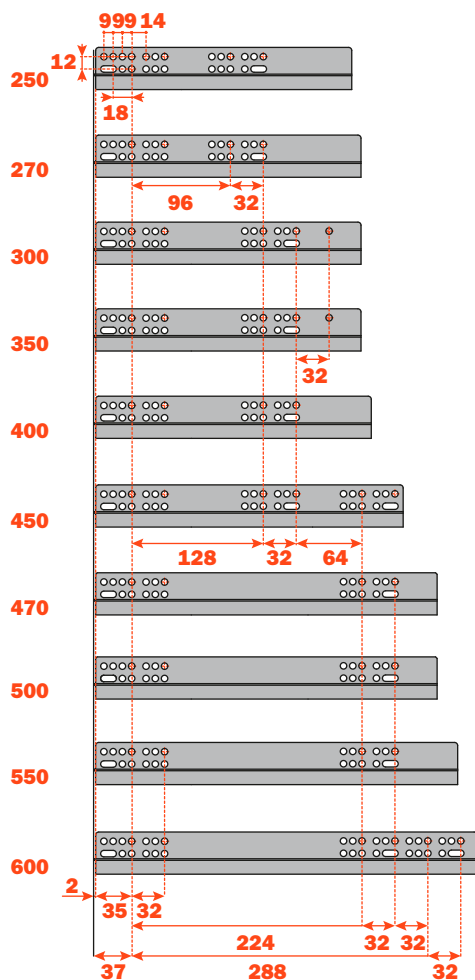


Drilling positions for runner on cabinet side. Full-extension

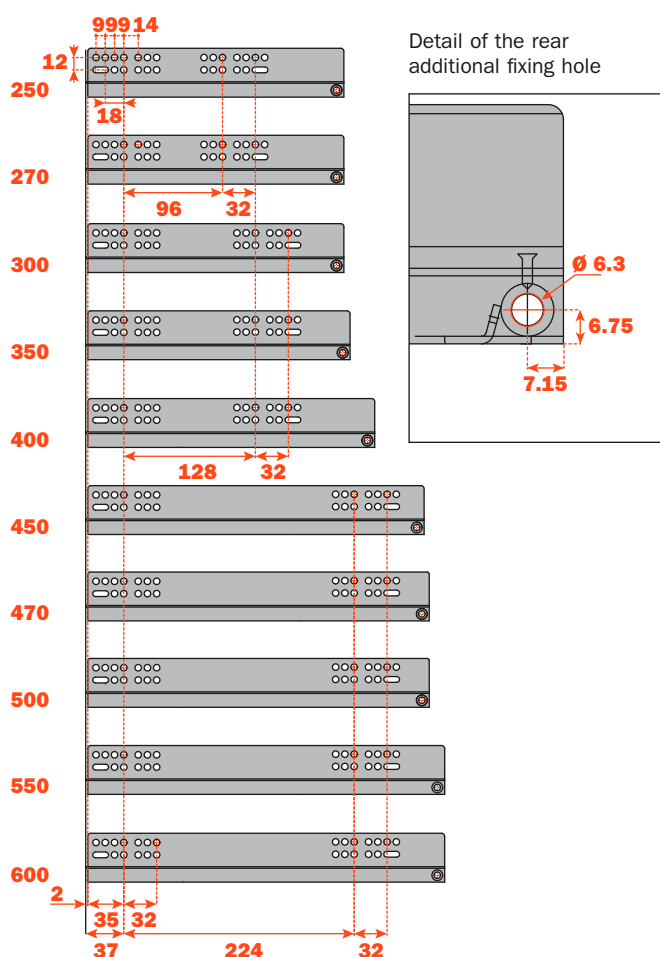

Drawer setting: abbreviations


Chest of drawers

- SP** = Thickness of the drawer
LN = Nominal runner length
PM = Depth of the cabinet
X = Internal width of the cabinet

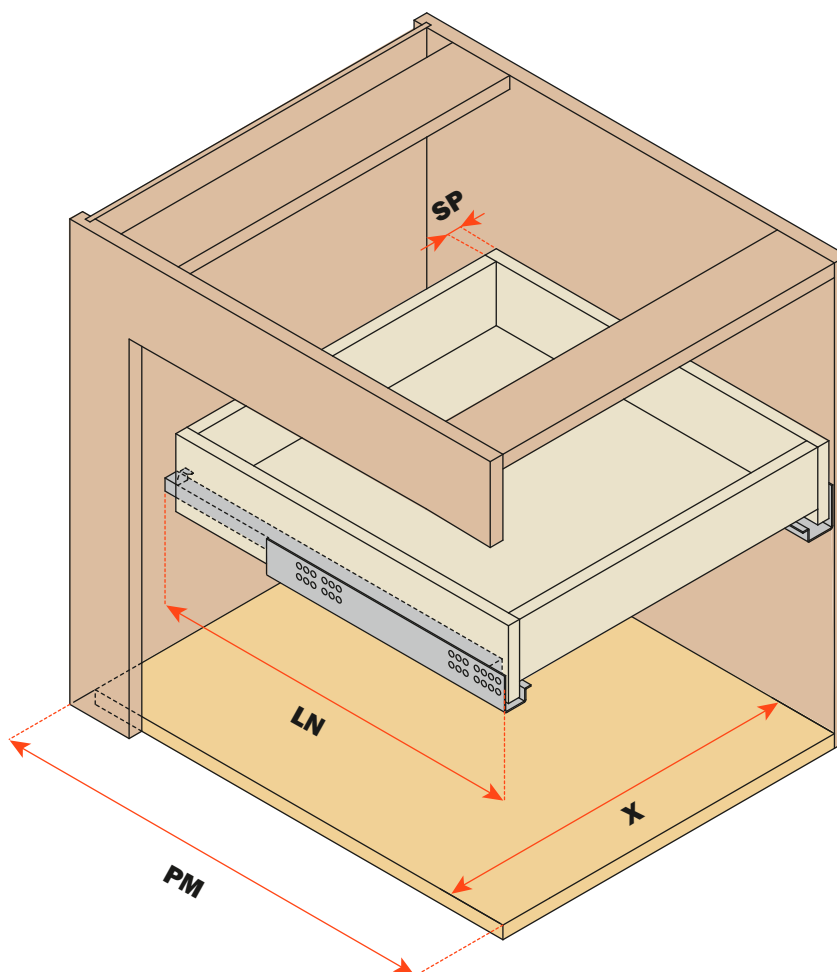

Drawer dimensions

- LC** = Runner length - 10 mm
X - 41 = Internal width of the drawer

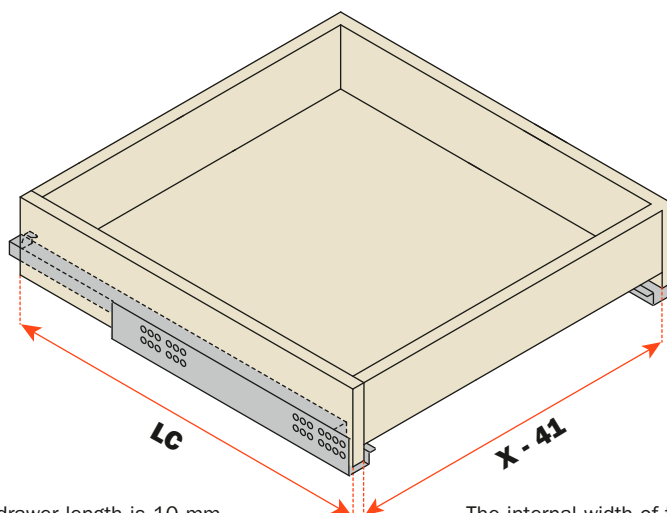


The drawer length is 10 mm shorter than the runner length

The internal width of the drawer is 41 mm less than the internal width of the cabinet


Drawer drilling

Drawer with frontal - three-sided (view from below)
Template for drawer drilling - see page 58

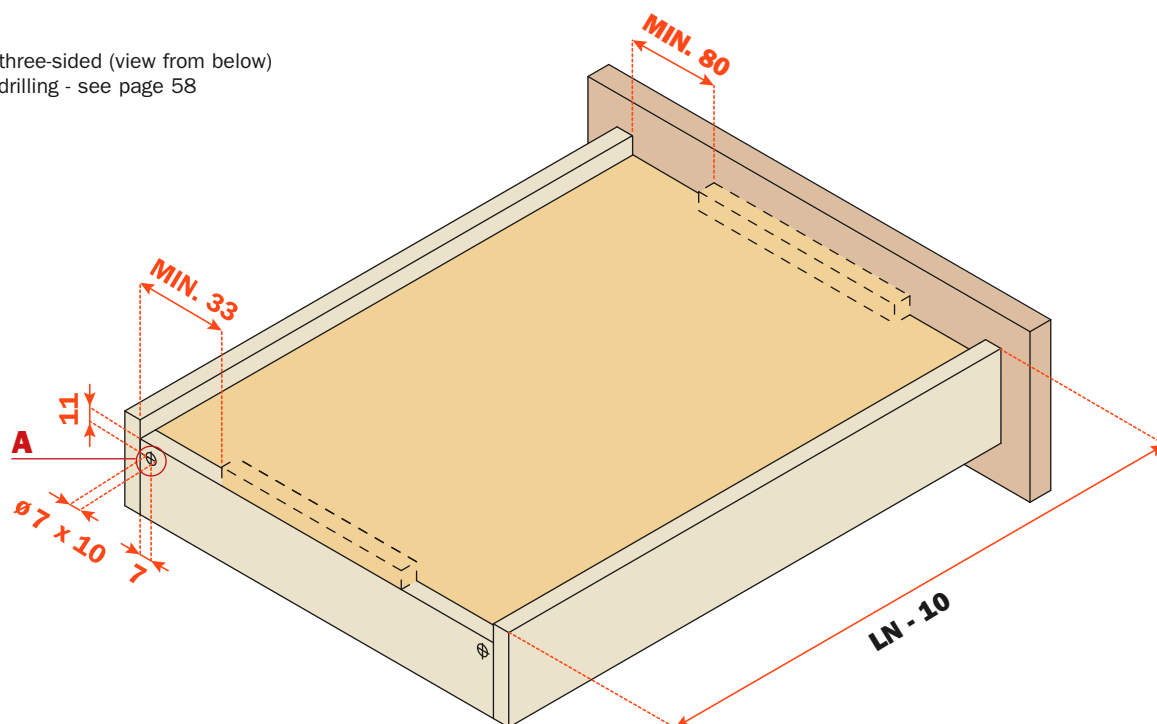


Drawer drilling




Internal drawer - four-sided (view from below)
Template for drawer drilling - see page 58

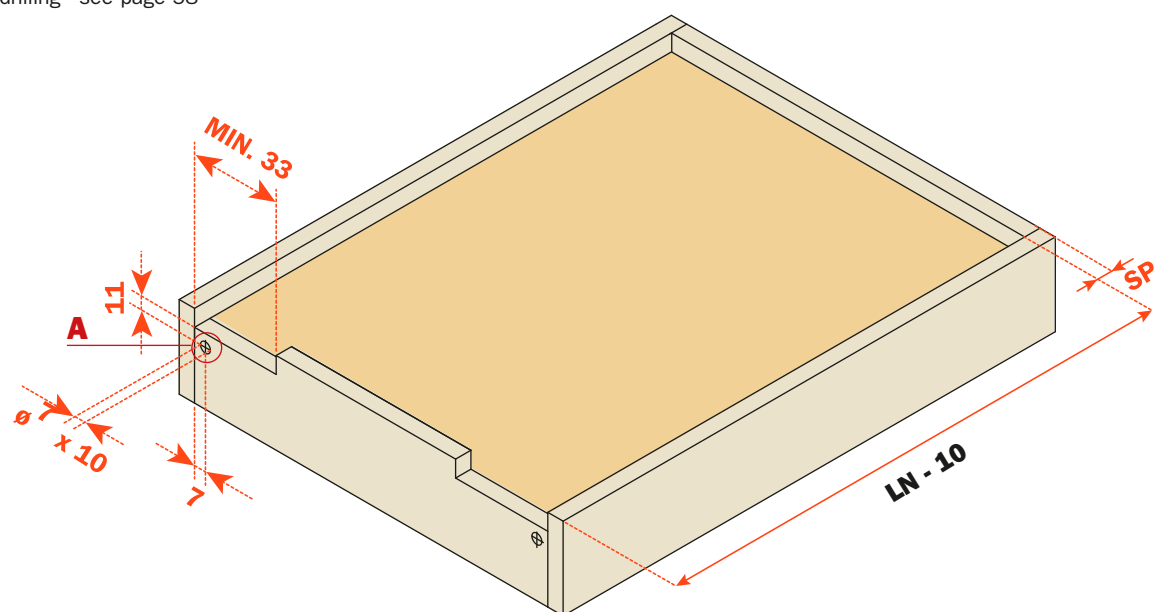

Rear hook





Fixing clip

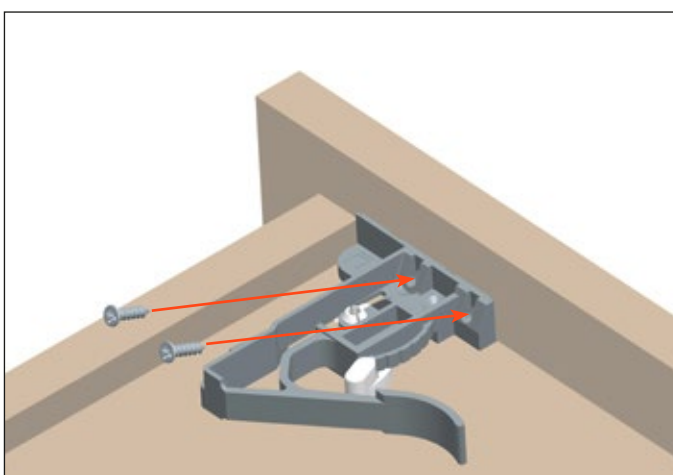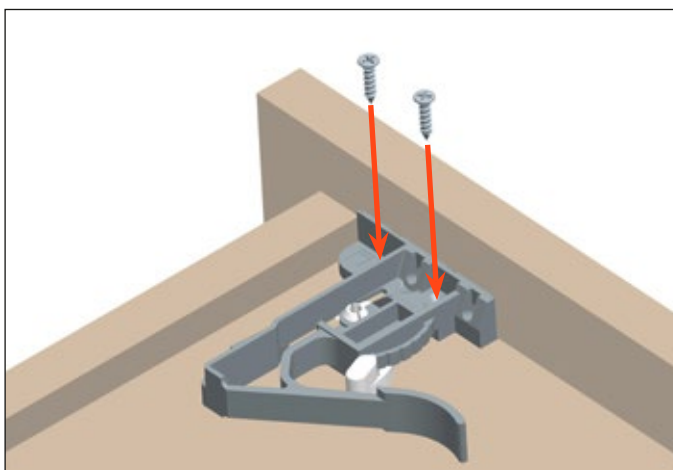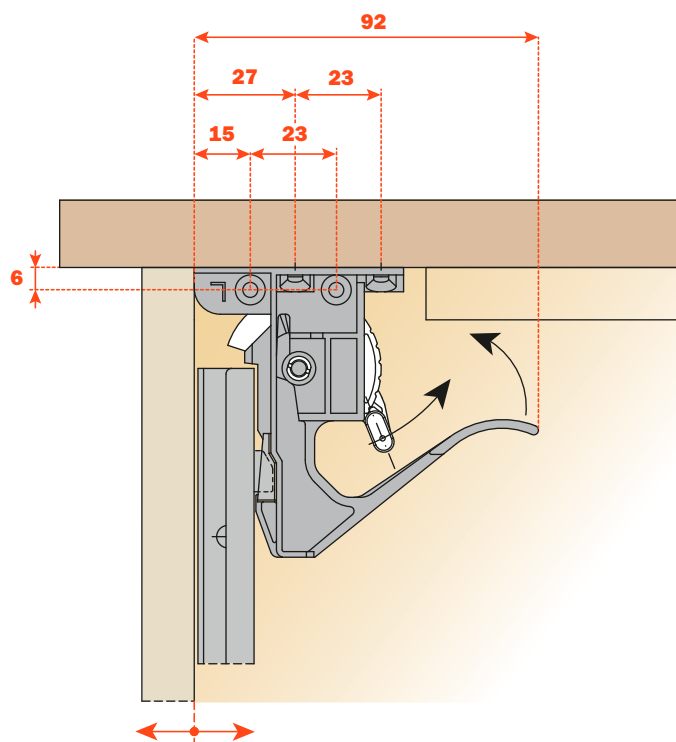

Drawer adjustment

Drawer height adjustment (+ 2,5 mm) using the lever indicated
This operation is tool free

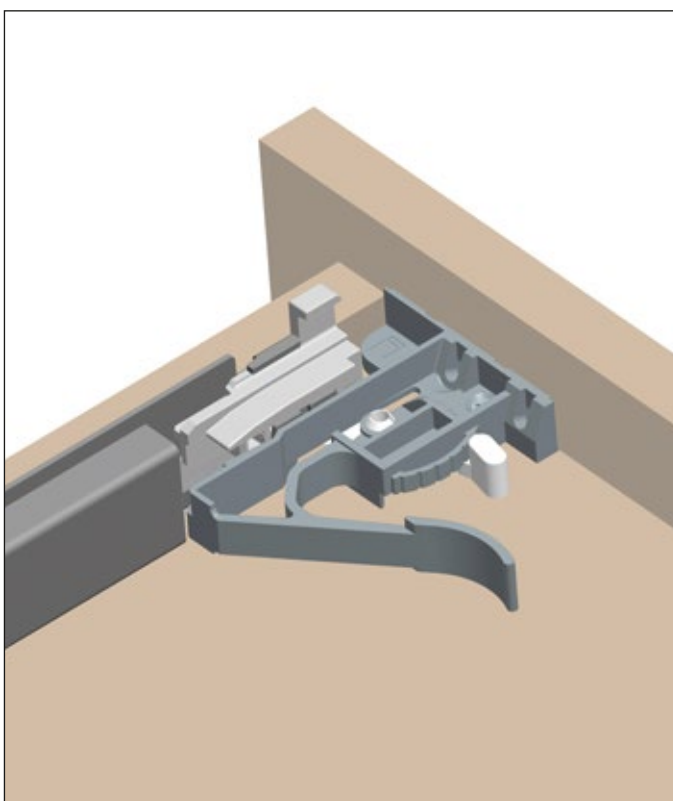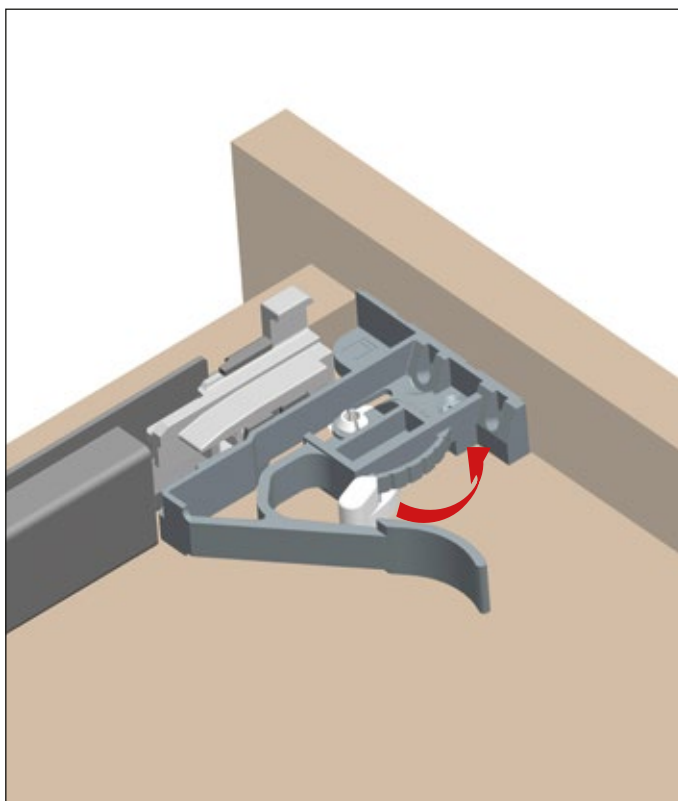

Futura Smove 6155 - Concealed runner




Part-extension runner fixed to the drawer by clip.

Smove: fully integrated in the runner, decelerates the closing action of the drawer.

Product features

- Dynamic load capacity N 294 (Kg 30).
- Smove decelerated closing.
- Safety system that prevents the drawers from turning over.
- Drawer height adjustment +2,5 mm.
- The drawer is maintained parallel with the cabinet side during opening.
- Compatible with ART. 6555.
- Finish: bright zinc-plated.



Dimensions

